


pecification

# **H2S-AH Hydrogen Sulfide Sensor**

## **High Sensitivity**



### Figure 1 H2S-AH Schematic Diagram

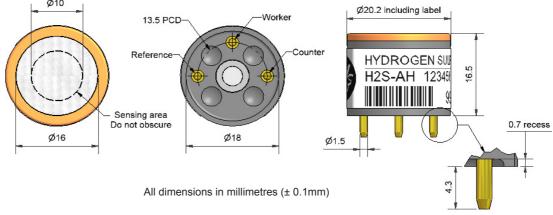

**Top View Bottom View Side View** 

PERFORMANCE	Sensitivity Response time Zero current Resolution Range Linearity Overgas limit	nA/ppm in 20ppm H <sub>2</sub> S t <sub>90</sub> (s) from zero to 20ppm H <sub>2</sub> S ppm equivalent in zero air RMS noise (ppm equivalent) ppm H <sub>2</sub> S limit of performance warranty ppm error at full scale, linear at zero and 20ppm H <sub>2</sub> S maximum ppm for stable response to gas pulse	950 to 1450 < 30 < ± 0.2 < 0.03 50 0 to -2.5 250
LIFETIME	Zero drift Sensitivity drift Operating life	ppm equivalent change/year in lab air % change/year in lab air, monthly test months until 80% original signal (24 month warranted)	< 0.05 < 2 > 24

#### **ENVIRONMENTAL**

NO <sub>2</sub> sensitivity	% measured gas @ 10ppm NO <sub>2</sub>	< -30
Zero @ 50°C ppm equivalent change from 20°C		< 0.5 to -2
Zero @ -20°C	$< \pm 0.5$	
Sensitivity @ 50°C	100 to 110	
Sensitivity @ -20°C	C % (output @ -20°C/output @ 20°C) @ 20ppm	80 to 92

CROSS	NO <sub>2</sub> sensitivity	% measured gas @ 10ppm	NO <sub>2</sub>	< -30
SENSITIVITY	Cl <sub>2</sub> sensitivity	% measured gas @ 10ppm	Cl <sub>2</sub>	< -25
	NŌ sensitivity	% measured gas @ 50ppm	NŌ	< 2
	SO <sub>2</sub> sensitivity	% measured gas @ 20ppm	$SO_2$	< 10
	CO sensitivity	% measured gas @ 400ppm	CO	< 1.5
	H <sub>2</sub> sensitivity	% measured gas @ 400ppm	$H_2$	< 0.15
	C <sub>2</sub> H <sub>4</sub> sensitivity	% measured gas @ 400ppm	$C_2H_4$	< 0.15
	NH <sub>3</sub> sensitivity	% measured gas @ 20ppm	$N\bar{H}_3$	< 0.1

### **KEY SPECIFICATIONS**

••	10110		
	Temperature range	°C	-30 to 50
	Pressure range	kPa	80 to 120
	Humidity range	% rh continuous	15 to 90
	Storage period	months @ 3 to 20°C (stored in sealed pot)	6
	Load resistor	$\Omega$ (recommended)	10 to 47
	Weight	a	< 6



At the end of the product's life, do not dispose of any electronic sensor, component or instrument in the domestic waste, but contact the instrument manufacturer, Alphasense or its distributor for disposal instructions.

Hong Kong:

## Apollosense Ltd

Adress: Room 712, Huaneng Building, Shennan Zhong Road, Shenzhen 518031,

Tel: (86-755) 83680810 83680820 83680830 83680860 Fax: (86-755)83680866

Adress: Unit 1502, Hollywood Plaza, 610 Nathan Road, Mong Kok, Kln., H.K.

Tel: (852) 2737 0903 Fax: (852) 2737 0938 Email: sales@apollounion.com



pecification

chnica

# **H2S-AH Performance Data**

### **Figure 2 Sensitivity Temperature Dependence**

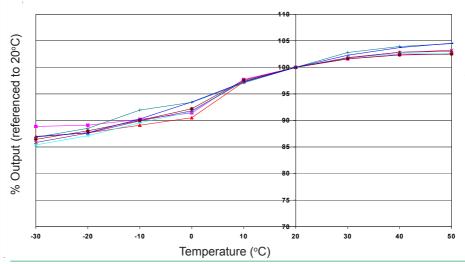


Figure 2 shows the variation in sensitivity caused by changes in temperature.

This data is taken from a typical batch of sensors.

### Figure 3 Zero Temperature Dependence

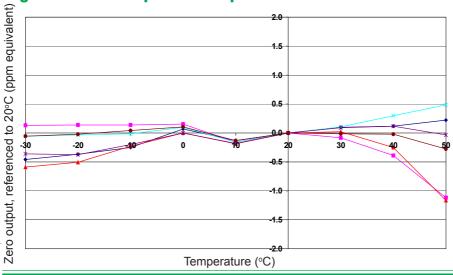


Figure 3 shows the variation in zero output caused by changes in temperature, expressed as ppm gas equivalent, referenced to zero at 20°C.

This data is taken from a typical batch of sensors.

#### **Figure 4 Sensitivity Long Term Stability**

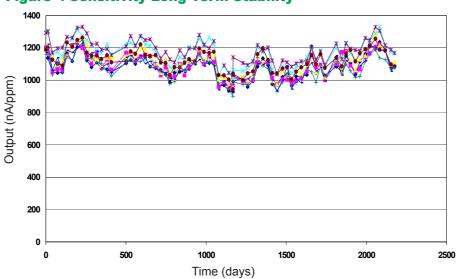


Figure 4 shows the excellent long term stability of the sensitivity of the H2S-AH resulting from the combination of patented design, superior electrochemistry and automated

### Apollosense Ltd

Shenzhen:

Adress: Room 712, Huaneng Building, Shennan Zhong Road, Shenzhen 518031,

Tel: (86-755) 83680810 83680820 83680830 83680860 Fax: (86-755) 83680866

Adress: Unit 1502, Hollywood Plaza, 610 Nathan Road, Mong Kok, Kln., H.K.

Tel: (852) 2737 0903 Fax: (852) 2737 0938 Email: sales@apollounion.com

Hong Kong: